

Microcontroller Boards

Useful information.

ESP32 DEVKIT

Espressif's ESP32 - got this board to play around with...


[esp32_devkit1.txt](#)

```
-----  
ESP32-DEVKITV1  
-----  
  
- clone of DOIT's ESP32 DEVKIT V1?  
- ESP-WROOM-32 (ESP32-D0WDQ6)  
  = ESP32-D0WD-based modules with integrated flash  
- DECISION20200822:  
  = toolchain and build environment is simply not worth it!  
  = WILL USE micropython instead!  
  = **added-A-LOT-later** OR, use Arduino IDE?  
  
-----  
micropython  
-----  
  
- get some tools  
  > pip install esptool rshell  
- download binary from https://micropython.org/download/esp32/  
  = selected esp32-idf3-20191220-v1.12.bin  
  = idf4 seems to be missing LAN? stick with idf3 for now...  
- erase flash  
  > esptool.py --chip esp32 --port /dev/ttyUSB0 erase_flash  
- flash micropython  
  > esptool.py --chip esp32 --port /dev/ttyUSB0 --baud 460800  
write_flash -z 0x1000 <bin>  
- use rshell to manage code (vfs)  
  > rshell --port /dev/ttyUSB0 --buffer-size=32  
- download file in rshell  
  > cp <file> /pyboard[/<more_path>]  
  
-----  
board info  
-----  
  
esp32 doit devkit v1  
vid = 0x10c4
```

```
pid = 0xea60
sn = 0001


esp32 doit devkit v1 (aliexpress - usb type c)
vid = 0x1a86
pid = 0x7523
sn = (null)
```

Decided to use [micropython](#). Pinouts shown below (*Disclaimer: Image copied from [RandomNerdTutorials](#)*).

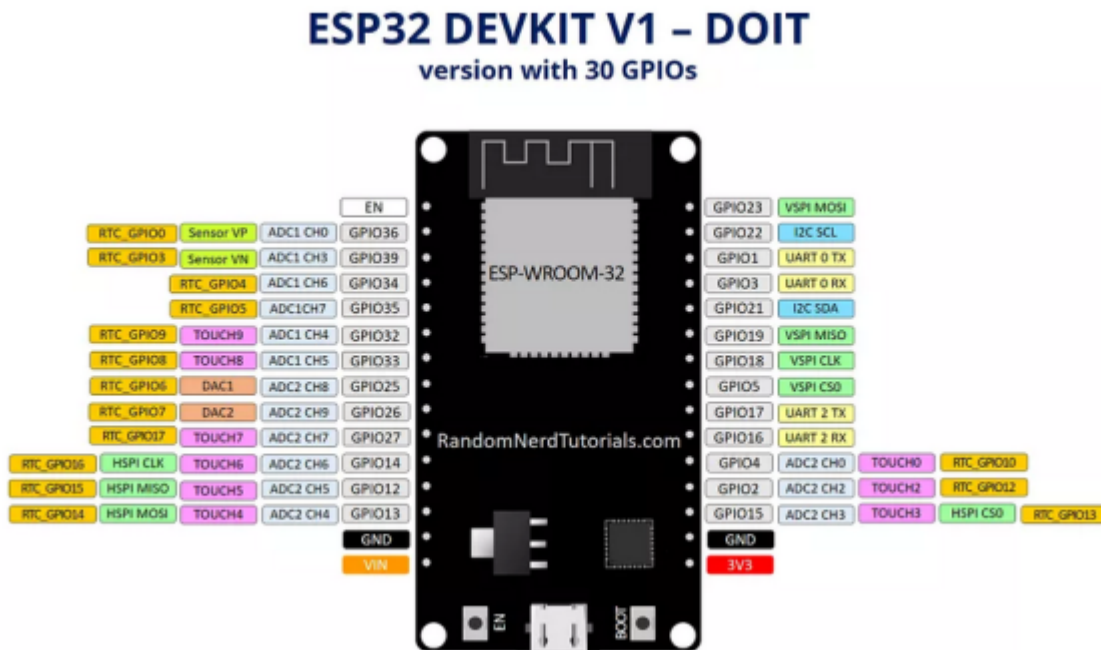


(Disclaimer: Sorry, I can't remember where I got the following two from...).

ESP32 DEVKIT V1 - DOIT

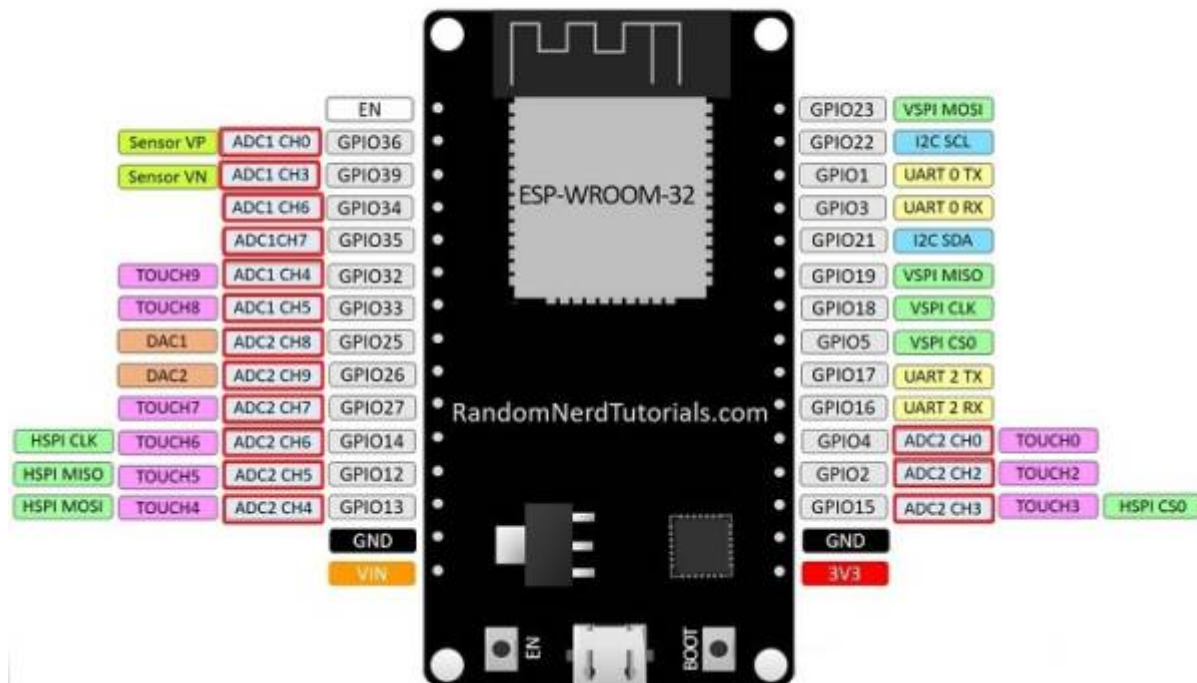

ESP32 DEVKIT V1 - DOIT

version with 36 GPIOs

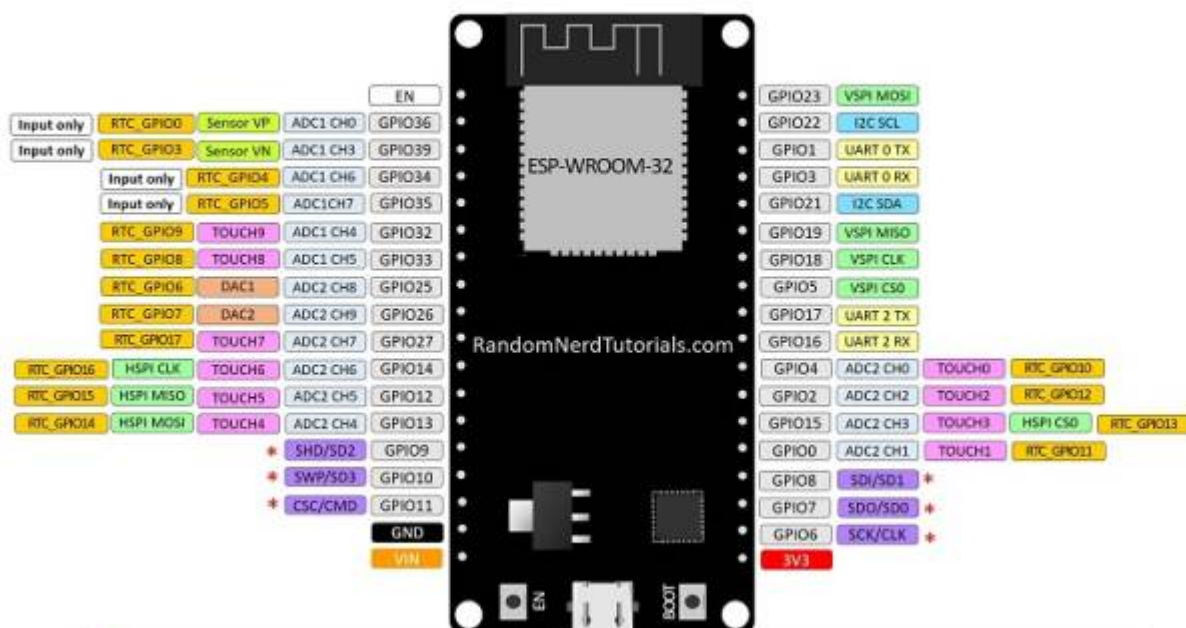

* Pins SCK/CLK, SDO/SD0, SDI/SD1, SHD/SD2, SWP/SD3 and CSC/CMD, namely, GPIO6 to GPIO11 are connected to the integrated SPI flash integrated on ESP-WROOM-32 and are not recommended for other uses.

Below is a simple python script to test SSD1306 OLED display which makes use of [this](#) micropython library code.

test.py

```
from machine import Pin, I2C
```

```

from ssd1306 import SSD1306_I2C
from time import sleep

def run_this():
    i2c = I2C(-1, scl=Pin(22), sda=Pin(21))
    oled_width = 128
    oled_height = 64
    oled = SSD1306_I2C(oled_width, oled_height, i2c)

    oled.text('Hello, World 1!', 0, 0)
    oled.text('Hello, World 2!', 0, 10)
    oled.text('Hello, World 3!', 0, 20)
    oled.show()

```

Using Arduino IDE:

- select Preferences>Additional Board Manager URLs
- enter https://espressif.github.io/arduino-esp32/package_esp32_index.json
- open Boards Manager and install esp32 (search for it)
- when selecting board for upload, select DOIT ESP32 DEVKIT V1

Note: esp32 flash tool requires python serial module (e.g. `pip install pyserial`)

ESP01S WiFi Module

Actually has an esp8266 controller (can be a standalone... e.g. NodeMCU). I primarily use this as WiFi module for 8051 systems.

[esp01s_info.txt](#)

```

Upgraded ESP-01S ESP8266 Serial WIFI Wireless Module Wireless
Transceiver
- ESP01S ESP8266-01S (stronger antenna signal compared to esp01)
- 1MB flash (from 512M)
- Integrated WEP, TKIP, AES, and WAPI engines. 802.11 b/g/n
- Wake up and transmit packets in 2ms
- standby power consumption of 1.0mW (DTIM3)

Feature:
- Power down leakage current <10uA
- Integrated low power 32-bit CPU could be used as application
processor

-----
|ANT. |
|     |
|     |
|8765|

```

```
| 1234 |
-----


1|tx|
2|ch_pd|1-enable
3|rst|0-reset
4|vcc|3.3v
5|rx|
6|gpio0|0-flash mode (def), 1-uart mode (prog)
7|gpio2|gpio
8|gnd|
```

XIAO SAMD21

Based on SAMD21 (Cortex-M0)

Note: Arduino IDE Board Setup

(https://files.seeedstudio.com/arduino/package_seeeduino_boards_index.json)

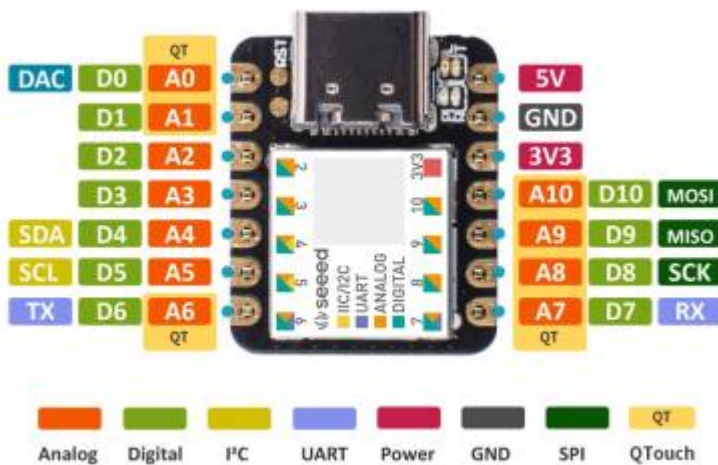


(Disclaimer: Image copied from [here](#).).

XIAO ESP32-C3

Using ESP32 core (?duh!)

Note: Arduino IDE Board Setup (Espressif's

https://espressif.github.io/arduino-esp32/package_esp32_index.json)

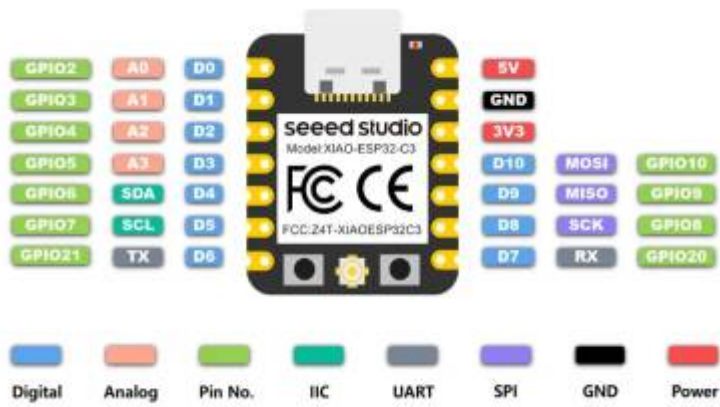

(Disclaimer: Image copied from [here](#).).

From:

<https://azman.my1matrix.cc/> - Azman @MY1

Permanent link:

<https://azman.my1matrix.cc/doku.php?id=notes:devs:board&rev=1777080760>

Last update: **2026/04/25 01:32**

